

Geosynthetics are artificial fabrics used in conjunctions with Soil or rock as an integral part of a man-made project.

Natural or Artificial products that is used along with Soil in geotechnical constructions.

Natural occurring geotextile: Coir, jute etc

Artificial Occurring geotextile : polymers ^(or) and metallic etc.

Why geoSynthetics?

- They have entirely changed the way geotechnical engineering is practised.
- Innovative Solutions to solve difficult problems economically.
- It enables the use of local materials.
- Unskilled labor can be employed.
- Installation does not require heavy machinery.

Types of ~~geotextiles~~ GeoSynthetics

- ① Geotextiles
- ② Geo grids
- ③ Geo nets
- ④ Geo membranes
- ⑤ Geo Cells
- ⑥ Geo Composite
- ⑦ PVD (prefabricated Vertical drains)
- ⑧ GCL (geosynthetic clay liners)

Geotextiles:

It can be simply defined as "a textile material used in a Soil environment" and includes Woven and Non woven polymeric materials and natural materials such as jute, manufacture using textile processes.

Polymers: Geotextiles are usually made from one of the

4 Synthetic polymers

- | | |
|----------------|-----------------|
| ① polyamide | ② polyester |
| ③ polyethylene | ④ polypropylene |

Polyamide: The production process and the material properties are influenced by the use of various additives such as

- Viscosity Stabilisers which Controls the degree of polymerisation during process.
- Ageing Inhibitors which protects the polymers against the ageing due to light or thermo-oxidation.
- Colouring i.e Carbon black which also has the advantage of increasing the stability of polyamide.

(2)

Polyester: Additives used in the production of polyester are

- ① Catalysts which increases the speed of polymerisation.
- ② phosphatic compounds which reduces thermal degradation during processing in the molten stage.
- ③ Ageing inhibitors which increases UV resistance.

Polyethylene: 2 main groups are identified

- low density polyethylene [density 920 - 930 kg/m³]
- high density polyethylene [density 940 - 960 kg/m³].

low density polyethylene is produced at high temperatures and pressures (upto 300 MN/m²)

high density polyethylene is produced at low pressures (4 MN/m²) and low temperatures.

Polypropylene:

- ① The polymerisation of propylene monomers in the presence of specific gravity catalysts produces the crystalline thermoplastic polypropylene
- ② It is very susceptible to oxidation and additives are required to protect against ageing.

- ③ other additives are also used to improve

ermal Stability, UV Resistance and underwater resistance.


Types of geotextiles:

Woven Geotextiles:

Non-Woven Geotextiles.

Woven Geotextiles: ① These were developed from Synthetic or natural fibers using weaving techniques.
② The weaving process gives these geotextiles an appearance of two set of parallel threads interlaced at right angles.

- ③ 'Wrap' runs along the length of the looms
- ④ 'Weft'
- ⑤ 'Weft' runs along transverse direction across loom.

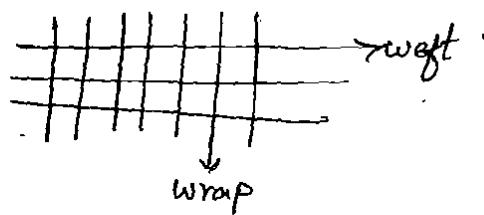

⑥ The yarn used to produce a woven geotextile may be monofilament (or) multifilament (or) a combination of each type.

- ⑦ The yarn in the wrap direction has to

stand the action of the loom's reeds continuously pulling & pushing it apart to make way for the shuttle which pulls the weft yarn through.

Non woven geotextiles: These are formed from filaments or fibres fibres arranged at random and bonded together into a planar structure.

The filaments or fibers are first arranged into a loose web, then bound together.

Non woven geotextiles are obtained by following processes:

- ① Thermal bonding:
 - (i) These geotextiles are produced by spinning continuous polymer filaments onto a moving belt which is then passed through heated rollers.
 - (ii) These rollers compress the layers of loose filaments and cause partial melting of the polymer, leading to the thermal bonding of these filament cross over points.

thermally bonded geotextiles tends to be relatively thin.

The random distribution of the filaments results in a wider range of opening sizes than is found in a woven geotextile.

The absence of any preformed orientation of the filaments results in a more isotropic strength compared to woven.

Mechanical Bonding: ① These geotextiles are formed by introducing a fibrous web into a machine equipped with groups of specially designed needles.

(ii) While the web is trapped b/w plates, the needles pushed through it and reorientate the fibres so that mechanical bonding is achieved.

(iii) In this process the fabrics obtained have high density, considerable bulk and thick.

Chemical Bonding: ① They are produced by spraying polymer filaments on to a moving conveyor and then spraying an acrylic resin into or onto the fabric web.

(ii) After curing or scrolling, strong bonds are formed b/w the filaments.



(iii) A forced-air drying operation is required to establish the open pore structure fabrics.

Functions of Geotextiles:


four basic functions of geotextile are

- (i) Separation
- (ii) filtration
- (iii) Drainage.
- (iv) Reinforcement.

Separation: A geotextile placed b/w a fine soil and a coarse material to prevents the two materials from mixing. with the introduction of this barrier the dissimilar materials are each able to function properly.

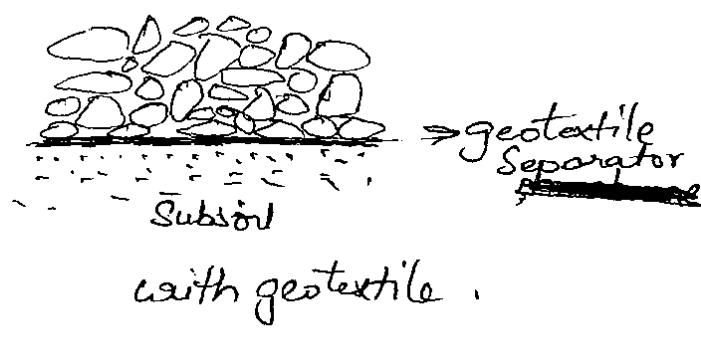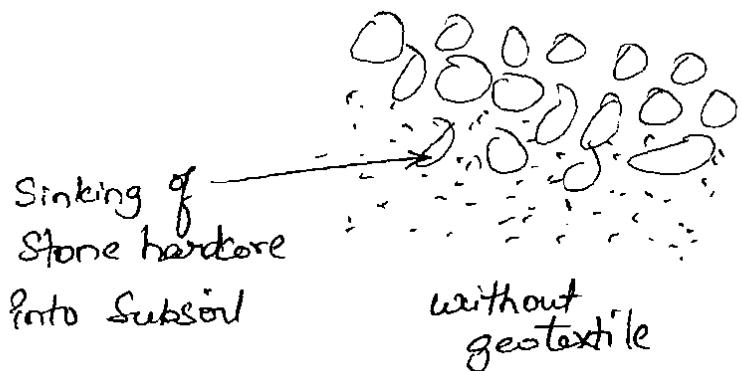


Filtration: A geotextile placed in contact with a soil, it allows water to pass through while preventing the passage of soil particles. Both adequate permeability and soil retention are required simultaneously over the design life of such application.

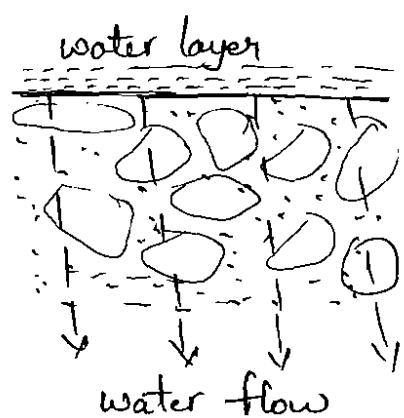

Without Geotextiles

(Here fines are ~~washed~~ away)

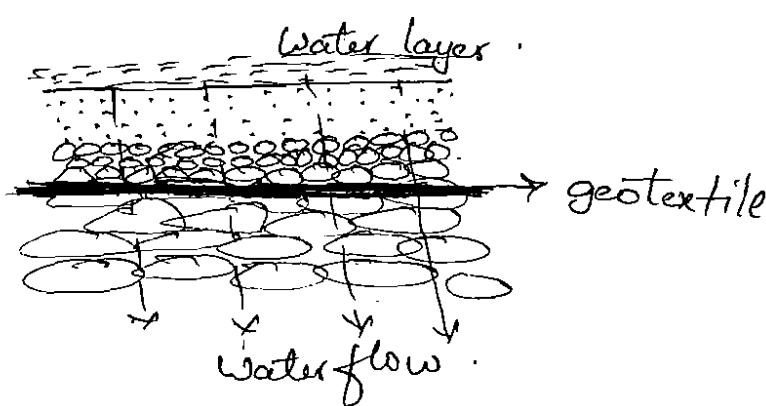

With geotextile


(Here fines are retained).

Drainage: A geotextile collects a liquid and conveys it towards an outlet. All fabrics can provide such a function, but a thin woven fabric obviously has less capacity than a thick needle punched non-woven.

However, the capacity of fabrics is limited &

composites drains have been developed to provide increased capacity.

The flow of water into the drains is controlled by the geotextiles which must also perform a filter function to prevent loss of capacity due to the soil entry into the drain.

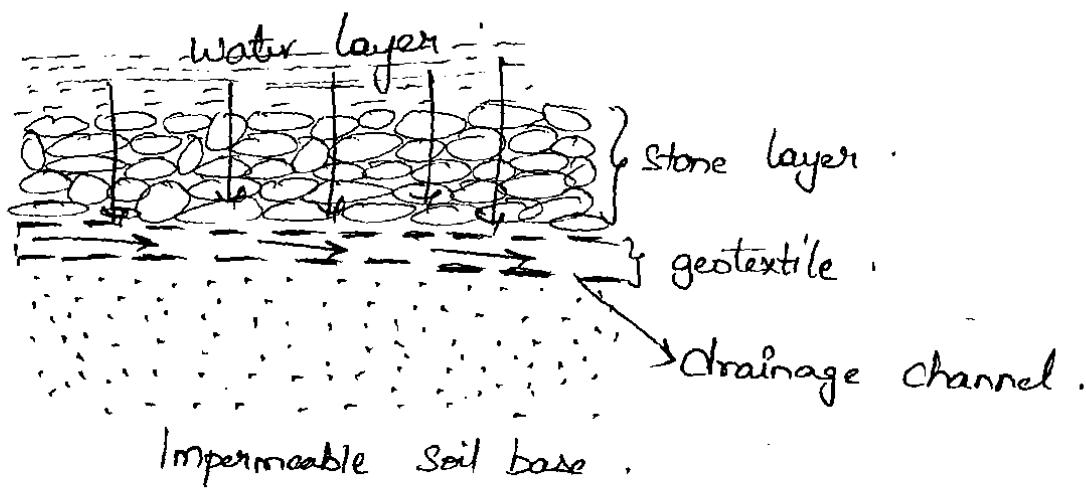

Reinforcement: A geotextile used to improve the mechanical properties of an earth structure by interacting with soil through interface shear.

Properties of Geotextiles:

- ① physical properties.
- ② Mechanical properties.
- ③ Hydraulic properties.

Physical properties:

mass/unit area: ① The mass per unit area is determined by cutting from a roll a minimum of 10 ~~Specimens~~, each at least 100 mm^2 , and then weighing the Specimens on an accurate balance.

- ② This test is used to determine quality of ~~geotextile~~ geotextile & helps in identify the material.
- ③ Cost of material is related to mass/unit area.

Normal thickness/ Dimensions: ① normal thickness is determined by placing a Sample of geotextile on a plane reference plate and applying a pressure of 2 kN/m^2 . through a ~~disc for~~ Circular pressure plate with a C/s area of 2500 mm^2 .

- ② Vernier gauge measures the thickness b/w pressure plate & reference plate.
- ③ This test is for determining quality, ~~test~~ & Classification of geotextile.

parent pore size distribution by dry Sieving:

The pore size distribution of the fabric is determined by Sieving dry Spherical glass beads for a Specified time at a Specified frequency of vibration and then measuring the amount retained by the fabric Sample.

This test provides information on the pore size distribution which is an important parameter to be used in assessing a geotextile Soil filtration Capability.

% Open Area determination for woven geotextiles:

A small section of the fabric is held within a Standard Slide Cover, inserted into a projector and the magnified image traced on to a Sheet of paper. Using planimeter, the magnified open spaces can be measured & expressed as ~~area~~ % of whole area.

- This test is applicable to monofilament woven fabrics.
- This test provides information on pore size openings which data is used for determining Soil filtration Capacity.

Mechanical properties:

Tensile properties using a wide width strip:

A Specimen of the geotextile at least 200mm wide is clamped within the compressive jaws of a tensile testing machine which is capable of applying the loads at a constant rate of strain. During loading a load-strain curve is plotted and from this the max load, breaking load & the secant modulus at any specified strain may be determined.

This test is useful for quality control & can also be used for design purpose.

Puncture strength of geotextiles:

A Specimen of the fabric is clamped, without tension, over a empty cylinder, and a solid steel rod is pushed through the fabric. A load indicator attached to the rod measures the force required to cause rupture.

A CBR (Soil) testing apparatus may be modified for this test.

This test is used to determine fabric resistance against aggregate penetration.

fabric's friction test: This is an adoption of the direct shear test, in this the fabric is firmly fixed to the top half of the shear box and a standard laboratory soil is used ~~to~~ in the bottom half.

The force required to cause sliding by the fabric & soil is determined for different normal stresses and the shear strength parameters are obtained.

This test is not a suitable test for assessing the parameters to be used for the analysis for reinforced soil. for reinforced soil application the proposed full material should be used in the test.

Hydraulic properties:

water permeability of geotextile (permittivity method):

This test measures the quantity of water which can pass through a geotextile. The permeability may be measured either in a constant head or falling head method.

Constant head method is more common due to the high flow rates through geotextiles.

Since there are geotextiles of various thicknesses available it is better to evaluate them in terms of permittivity, which relates the quantity of water passing

rough in a geotextile under a given head over a particular
of area.

This test is useful in classifying geotextiles &
for comparing the in isolation water permeability of geotextiles.

constant head hydraulic transmissivity: This method may be used
to estimate the in plane permeability of a geotextile
or a composite drain. The sample is confined, at varying
normal stresses and the flow under a constant head
is measured.

This test is useful for classifying geotextiles
and geocomposite drains & will provide information to
allow comparisons of in plane permeability to be
made.

International testing standards for geotextiles.

BS - British Standards

EN - European Norms.

ISO - International Standards organization.

ASTM - American Society of testing materials.

all provide testing methods for geotextiles &
related products.

British Standards:

BS 6906 : part 1:1987

wide width tensile test

[BSEN ISO 10319, ASTM D 4585:1988]

BS 6906 : part 2: 1989

Determination of apparent pore size distribution by dry Sieving.

[ISO 12 956, ASTM D 4751:1993]

BS 6906 : part 3: 1989

Determination of water flow normal to the plane of geotextiles under a constant head [ISO 11058, ASTM D 4491:1992]

BS 6906 : part 4 : 1987

static pressure test (CBR)

[BSEN ISO 12236, ASTM D 4833:1988]

BS 6906 : part 5 : 1991

Determination of Creep (ISO 13341,
ASTM D5262:1992)

BS 6906 : part 7 : 1990

Determination of in plane waterflow.
(ISO 12958, ASTM D4716:1987)

BS 6906 : part 6: 1990

Dynamic perforation test

(BSEN 198, ISO 13 433, ASTM D 4833:
1988)

BS 6906 : part 8: 1991

Determination of sand geotextile frictional behaviour by direct shear

(ISO 12957 part 1, ASTM D 4886:1988)

American Society of testing materials:

ASTM D 3786: 1987: hydraulic bursting strength of Knitted goods & non woven fabrics.

ASTM D 4354: 1989: Sampling and preparation of test Specimens
(BSEN 963, ISO 9862:1990)


ASTM D 4491: 1992: determination of water flow normal to the plane of geotextile under a constant head
(ISO 11058, BS 6906: part 3: 1989).

Geogrid: A geosynthetic material consisting of connected parallel set of intersecting ribs with apertures of sufficient size to allow strike through of surrounding soil, stone, or other geotechnical materials.

Thus geogrids are matrix like materials with large openings called apertures, which are typically 10 to 100mm b/w ribs that are called longitudinal & transverse respectively.

The ribs themselves can be manufactured from a ~~number~~ number of different materials, and the ribs cross-over joinings (or) junction bonding methods can vary.

The primary function of geogrids is clearly reinforcement:

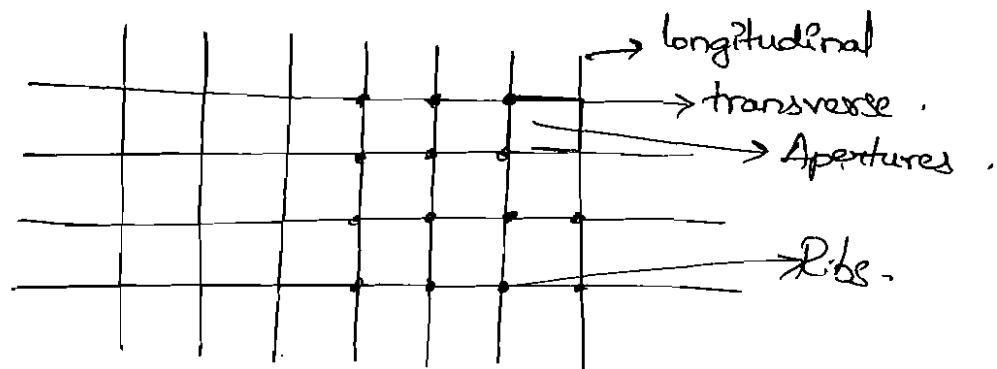

types: Axial & Braided

properties: ① Geogrid tests are unique in a number of aspects when compared with geotextiles.
② properties relating to separation, filtration,

drainage, and barrier, applications are not included since geogrids always serve the primary function of reinforcement.

physical properties:

Many of the physical properties of geogrids - including the type of structure, sub dimensions, junction type, aperture size and thickness can be measured directly and are relatively straightforward.

Other properties like ① mass/unit area varies over a tremendous range from 200 to 1000 g/m².

② % open area which varies from 40 to 95%.

Density: ① The density (or) specific gravity of a geogrid depends upon the polymer from which it is made.
② Homogeneous geogrids are made from HDPE (or) PP and density can be measured using ASTM D792 (or) D1505 codes. Values obtained will be < 1 .

③ Rod (or) Strap geogrids made from PET can use the same test methods and the resulting value will be > 1 .

out of plane bending Stiffness: This test (Bending Stiffness) can

be measured using ASTM D1388, a test for flexural rigidity. This test method slides a geogrid test specimen hanging over a inclined plane measuring an angle of 41.5° with the horizontal. When the geogrid bends and eventually touches the surface of the inclined plane, its distance is measured and then related to the mass/unit area.


The strap geogrids are quite stiff and are characterized by having flexural rigidity values $> 1000 \text{ g-cm}$.

The woven or knit yarn geogrids are quite ~~flexible~~ flexible and are characterized by having ~~flexible~~ flexural rigidity value less than ($<$) 1000 g-cm in this test.

In plane torsional Stiffness: In this test a bidirectional geogrid test specimen is clamped in a rigid frame and firmly gripping the central node.

A torque is applied and the angular rotation versus the geogrid resistance is measured.

The resulting plot shows a near linear performance for the stiff geogrids



for the flexible geogrids the response is initially low, but after 5 to 10° rotation, the resisting force increases

This test is applicable for bidirectional geogrid reinforcement in pavement base courses & soil foundation stabilizations.

Mechanical properties:

wide wide tensile strength: geogrid is clamped to a testing plate. Clearly the wide width tensile strength of a geogrid, in its machine direction for unidirectional geogrids and in both machine and cross machine directions for bidirectional geogrids. The resulting data gives strength of a geogrids in units of force per unit width. which is calculated by using the repeat distance of actual geogrid structure.

Obviously there is an extremely wide range in product behaviors. depending on type of polymer, its structure, Spacing of ribs, and so on.

There are 2 procedural test methods used to evaluate the wide width tensile Strength of geogrids. One choice is to use ASTM D6637.

which has a provision for measuring single rib strength or multiple rib strength.

Shear Strength: The geogrid is fixed to a block and is forced to slide over stationary soil in a shear box while being subjected to normal stress. The maximum shear stress, its shear strength is obtained. Then a new test with a replicate geogrid specimen and soil is conducted. This process is repeated sufficiently often to develop a set of shear strength versus normal stress points.

ENDURANCE properties:

Installation damage: geogrids undergo damage during the construction process.

→ The amount of damage depends upon the type of aggregate, level of compaction, type of compaction equipment & construction practices.

→ The installation damage factor is specified after extensive field test for site specific.

Conditions :

→ ASTM 5818 recommends that the results from at least 20 tests should be used to determine the installation damage factor.

typical damage factors are

- ① for use in gravels / aggregates 1.1 to 1.2
- ② for use in fine soils 1.05 to 1.1
- ③ for use in railway tracks the damage factor could be much higher because of the larger angular ~~partic~~ particles

• Tension Creep behavior: A major endurance property involving geogrids is their sustained-load deformation or tension "Creep". Since all polymers used in the manufacturing of geogrids consist of long-chain molecules arranged in crystalline regions with interspersed amorphous regions, the creep response reflects upon the percent crystallinity and the glass transition temperature.

Creep Rupture Behavior: A variation of the tension Creep test just described is the Creep rupture test procedure presented by Ingold. In this procedure higher stresses are imposed on the test Specimens, causing failure to occur in a relatively short time. Upon performing a number of such test, a graph of load-versus-log time can be generated. When extrapolated out to the desired service lifetime an acceptable load can be obtained. When normalized to the short term value, the inverse of this ratio becomes the reduction factor to be applied on ultimate strength.

21/9/17:

2, 5, 6, 9, 10, 14, 19, 21, 23, 24, 25, 26, 27, 30, 33, 35, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 50, 54, L-2, 4, 7, 8, 11, R-150.